

LOOSETUBE 48 OM4

Product sheet
Loosetube 48 OM4

V2.0, 2022-03-04

Micropol Fiberoptic AB
Älvdalsvägen 4
313 50 Åled


Phone: +46 (0)35 17 85 39
Mail: info@micropol.com

FEATURES

- Compact
- Resistant
- Totally dielectric
- Easy stripping
- Flexible Tubes

APPLICATION

Low-smoke cable suitable for indoor applications with high flexibility and are totally dielectric. Suitable for data centers with high demands on the cable.

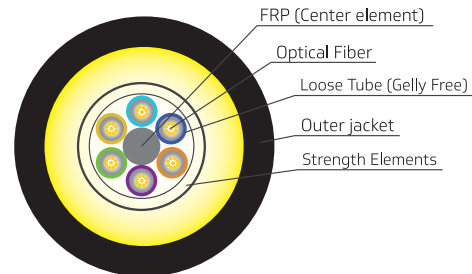

CPR CLASSIFICATION (EUROCLASS)

Reaction to Fire: Dca, s2, d2, a2

Declaration Code: DOP01052

FIRE RESISTANCE

Flame/Fire retardant (IEC 60332-1/-3)

Halogen free (IEC 60754-1/-2)

Low smoke emission (IEC 61034-2)

CHARACTERISTICS (INDOOR/OUTDOOR)

Temperature Range	-20°C to +70°C (IEC 60794-1-22 F1)
Max. Tensile Load (N)	700 (IEC 60794-1-21 E3)
Max. Crush (N/dm)	700 (IEC 60794-1-21 E3)
Min. Bending Radius (mm)	10 x Outer Ø (IEC 60794-1-21 E11)

These specifications are subject to change without prior notification.