

# LC PREMIUM CONNECTOR

Product sheet  
LC Premium Connector

V1.0, 2020-03-09

Micropol Fiberoptic AB  
Älvdalsvägen 4  
313 50 Åled

Phone: +46 (0)35 17 85 39  
Mail: info@micropol.com




## APPLICATION

The LC premium connector are molded with a single body and delivers maximum strength against mechanical tests. Manufactured to the highest standard, the LC connector is to meet and exceed the Verizon FOC TPR requirement and designed for the usage for the OSP application or where customers needs the highest quality product.

## CHARACTERISTICS (INDOOR/OUTDOOR)

Average Against Master (UPC)	0,08
Mean Value Random Mating (UPC)	0,12
Operating Temperature	-40°C to +75°C
Durability	<0,2dB typical change, 500 matings

*These specifications are subject to change without prior notification.*

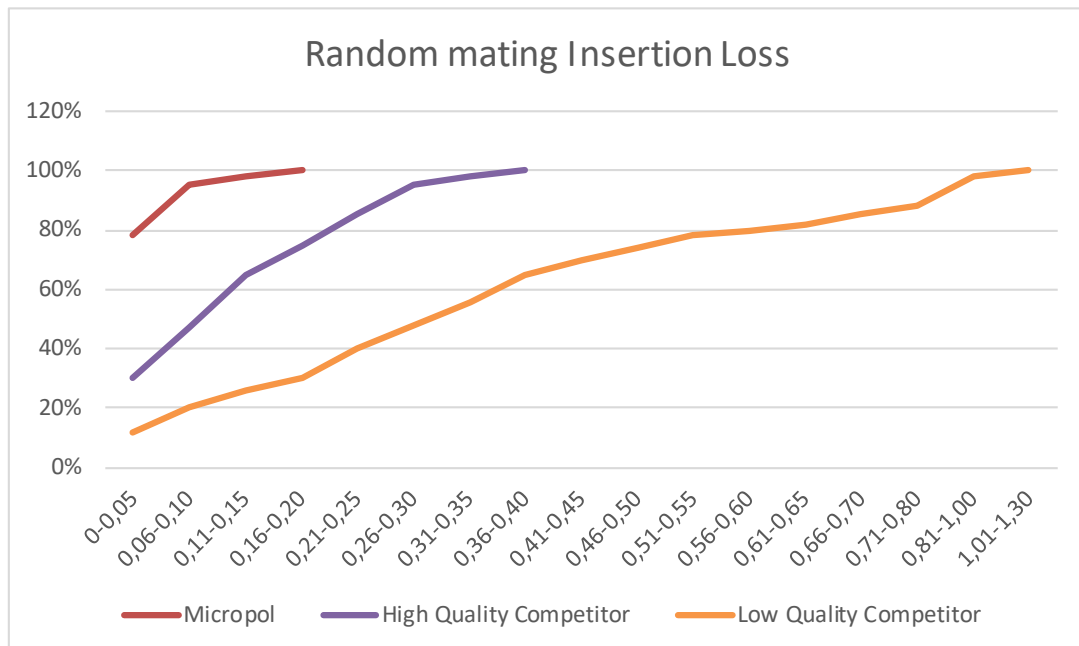

## FOR MORE INFORMATION

Check [www.micropol.com](http://www.micropol.com) or call us on +46 (0)35 260 72 18.

