

ROCKY TUBE

Product sheet
Rocky Tube

V4.0, 2021-10-11

Micropol Fiber optic AB
Älvdalsvägen 4
313 50 Åled


Phone: +46 (0)35 17 85 39
Mail: info@micropol.com

FEATURES


- Tailor-made
- Bend limiting
- Cable Tie Secure
- 1-24 fiber per tube
- Halogen-free




DRAWING CONSTRUCTION

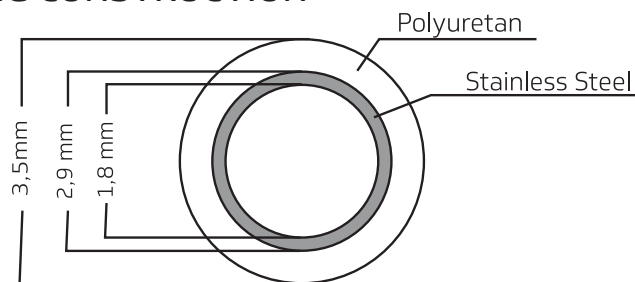

BEND RADIUS



DRAWING STAINLESS STEEL ELEVATION

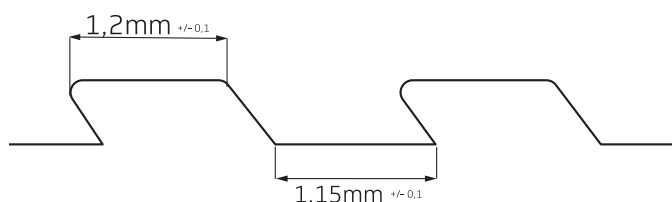

TECHNICAL SPECIFICATION

Product	6876/ ROCKY-2	Tensile strength	490N
Material	Stainless steel & Polyuretan	Radial pressure	1176N/50mm
Outer diameter PU	3,5 mm	Min. bend radius	r = 8,0mm
Outer diameter SS	2,9 mm	Temp. range	-55 °C – +120 °C
Inner diameter SS	1,8 mm	Fire class	IEC 60332-1-2 + CS-25 BOOK 1
Weight	20g/meter		